

ASPHALTrapid®

**YOUR BEST ALLY FOR QUICK PAVEMENT WORKS
AND
SMALL ROAD RECONSTRUCTION**



A revolutionary product for quick pavement works

1. THE PRODUCT

- Ready to use
- Very practical - workable mix (malleable)
- Allows application on rainy weather
- Long durability (1 – 2 years)
- Easy storage
- Colour: Black
- Density: 1500kg / m³

2. THE USE

- Potholes
- Small roads reconstruction
- Sidewalks and parks
- Sewage boxes repairs
- Electricity boxes filling
- Cycle lanes
- Others



3. THE APPLICATION

The product is ready for **cold use**. The application is performed directly. No irrigation or impregnation is necessary.


You can either use cars movements or steamroller to pave and regularize application.



4. THE PACKAGING

The product is packed in

- Small bags of 25 kg, containing rectangular pieces
- Big bags of 1'000 kg, containing cubic pieces.

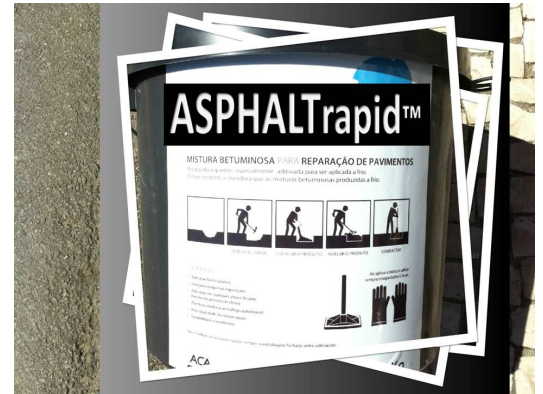

5. HOW IS IT PRODUCED

It is a hot and cold technologies combination that allows creating long-term durable & flexible asphalt mix.

- Mix produced in a regular hot mix plant with special formulation and additives
- It does not require any changes in plant
- It uses bitumen (instead of emulsion) + special compounds
- Regular hot mix bitumen highly resistant
- Composition: 94% aggregates + 5% bitumen* + 1% special additives
- Several curves could be produced

* The bitumen used is usually the grade 35/50, but can also be produced by using grade 50/70 or specific grade required by client.

6. CLIENTS

- ❖ Construction & repair companies
- ❖ Road concessionaires
- ❖ Parking
- ❖ Sewage & Electricity companies
- ❖ Others

7. ADVANTAGE

- ✓ Immediate traffic opening
 - No waiting time required
- ✓ Very long lasting product
 - Bagged, it can last 1-2 years time
- ✓ The best of hot & cold technologies are used
 - Hot to produce using asphalt as binder
 - Cold for friendly use and more practical
- ✓ It uses same formulation as regular asphalt binder
 - + Additives 100% bio

8. DELIVERY & QUANTITY

- Delivery: Ready for shipment 3 weeks after order confirmation.
- Minimum order: 20 tons (1 x 20' container).



9. ILLUSTRATIONS

